



APPLICATIONS

- Shopping malls
- Sports centres
- Theatres / auditoriums
- Conference rooms
- A/V presentations
- Corporate rooms
- Perimeter reinforcement in clubs
- Cafés
- Restaurants
- Theme parks

ARQIS series has been specifically designed to fulfil permanent installation requirements where a perfect balance between sound performance and architectural / interior's design matching is a must.



ARQIS105 / 106 Connection plate



**ARQIS105 / 106 / 108
Wall bracket (included)**




ARQIS108 Connection plate


ACCESSORIES




ARQ108:
■ ARQ108UB

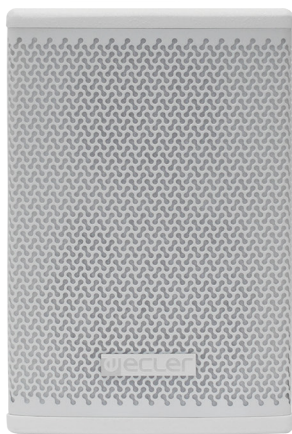

ARQIS105

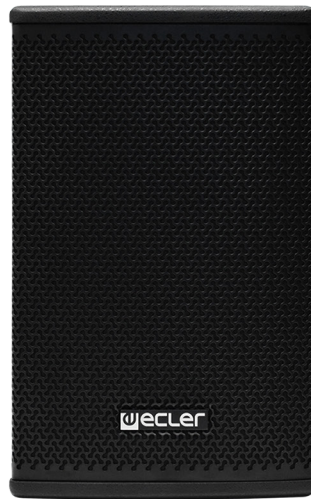

ARQIS106

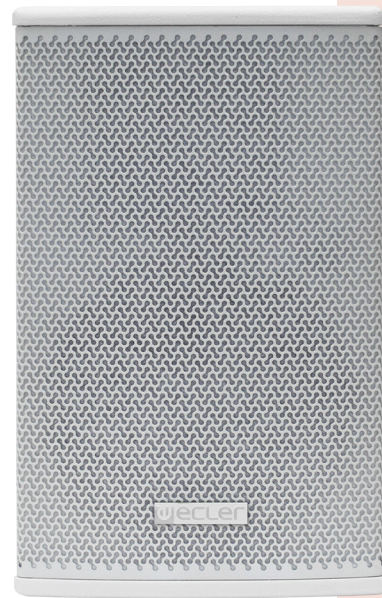

ARQIS108

KEY FEATURES

ARQIS105 / ARQIS106 / ARQIS108:

- Full range, 2-way architectural loudspeaker
- Double INPUT/STACK connector, Euroblock (+ Speakon®: ARQIS108) type, with security attachment screws to avoid accidental disconnection
- Wall bracket included, allowing for pan&tilt adjustment, employing a single screw for fastening
- U-bracket wall-mount accessory compatible, ARQ108UB (not included) (ARQIS108)
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

	ARQIS105	ARQIS106	ARQIS108
RMS power / Program power (80)	70W / 140W	120W / 240W	150W / 300W
Woofer / driver	5,25" / 1" (tweeter)	6,5" / 1"	8" / 1"
Connector	Euroblock	Euroblock	Euroblock + Speakon
SPL 1W/1m	89 dB	92 dB	93 dB
Dimensions / Weight	HxWxD: 280x186x210mm / 3,6 kg.	HxWxD: 350x216x240mm / 7,4 kg.	HxWxD: 390x244x280mm / 8,4 kg.



ARQIS205 / 208 Connection plate



ARQIS205
With U bracket (included in ARQIS205 / 208)



ARQIS208

KEY FEATURES

ARQIS205 / ARQIS208:

- Full range, 2-way architectural loudspeaker
- Double INPUT/STACK connector, Euroblock + Speakon® type, with security attachment screws to avoid accidental disconnection
- "U" Shape wall bracket included, allowing for tilt adjustment
- 8 x M8 cabinet flying points.
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

	ARQIS205	ARQIS208
RMS power / Program power (80)	140W / 280W	300W / 600W
Woofer / driver	2x5,25" / 1"	2x8" / 1"
Connector	Euroblock + Speakon	Euroblock + Speakon
SPL 1W/1m	92 dB	96 dB
Dimensions / Weight	HxWxD: 186x480x210mm / 8,4 kg.	HxWxD: 244x610x280mm / 14,4 kg.



ACCESSORIES



■ TRIPO1



■ SR12



ARQIS110:

■ ARQ110UB




ARQIS112:


■ ARQ112UB



ARQIS110 / 112 Connection plate

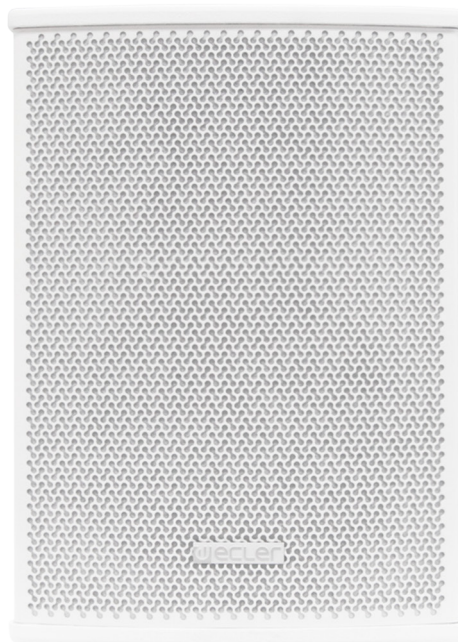

ARQIS110

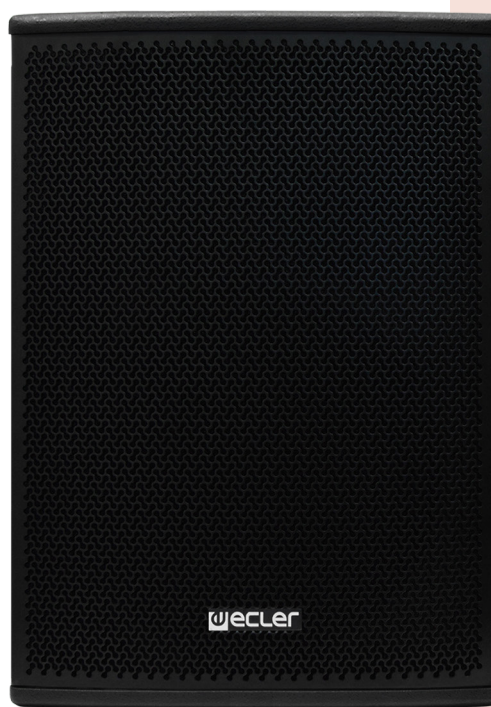

ARQIS112

KEY FEATURES

ARQIS110 / ARQIS112:

- Full range, 2-way architectural loudspeaker
- Double INPUT/STACK connector, Euroblock + Speakon® type, with security attachment screws to avoid accidental disconnection
- U-bracket wall-mount accessory compatible, ARQ110UB/ARQ112UB (not included)
- 35 mm mount socket, compatible with SR12 wall brackets and TRIPO1 floor stands (not included)
- 8 x M8 cabinet flying points.
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

	ARQIS110	ARQIS112
RMS power / Program power (80)	220W / 440W	340W / 680W
Woofer / driver	10" / 1"	12" / 1,4"
Connector	Euroblock + Speakon	Euroblock + Speakon
SPL 1W/1m	95 dB	97 dB
Dimensions / Weight	HxWxD: 495x359x310mm / 14,8 kg.	HxWxD: 565x416x352mm / 20,0 kg.



CABINETS/ ARQIS Series

Architectural Wooden Cabinets



ARQISSB10



**ARQISSB10
Connecton plate**



**ARQISSB6T
Connecton plate**



ARQISSB6T



**ARQISSB6T
With U bracket (included)**



ARQISSB15



**ARQISSB15
Top-hat mount socket**



**ARQISSB15
Connecton plate**

KEY FEATURES

ARQISSB6T:

- 6,5" subwoofer + 6,5" pasive radiator
- Ready for 70/100V installations: power selector 60/120W & 8 ohm
- Euroblock connector and spring loaded input terminals
- LPF cut-off frequency selection: OFF/ 120Hz / 150Hz
- Wall-mount hardware included
- Available in black or white finish

ARQISSB10:

- 10" sub-woofer
- Euroblock connector and spring loaded input terminals

- LPF cut-off frequency selection: OFF/ 120Hz / 150Hz

- Wall-mount hardware included
- 12 x M8 cabinet flying points
- Available in black or white finish

ARQISSB15:

- 15" sub-woofer
- Double INPUT/STACK connector, Speakon® type
- 35 mm top-hat mount socket, for pole mount combinations with ARQIS10, ARQIS12, etc.
- 8 x M8 cabinet flying points.
- Available in black finish

	ARQISSB6T	ARQISSB10	ARQISSB15
RMS power / Program power (8Ω)	60/120W @ 70/100V ; 120W @ 8Ω	150W / 300W	600W / 1200W
Woofer	6,5" + 6,5" passive radiator	10"	15"
Connector	Euroblock + spring loaded terminals	Euroblock + spring loaded terminals	Speakon
SPL 1W/1m	86 dB	94 dB	98 dB
Dimensions / Weight	HxWxD: 390x250x130mm / 8,2 kg.	HxWxD: 442x600x228mm / 16,5 kg.	HxWxD: 460x534x525mm / 32,0 kg.