

Gauge	5/32
Manufacturing	Cut Pile
Pile description	PP Twistex 2-ply
Primary backing	Woven
Pile weight	760 gr/m ²
Number of tufts	85.800 /m ²
Secondary backing	Easyback
Width	400 cm
Total weight	1630 gr/m ²
Total height	6 mm
Pile In/Out	Out
Roll length	30 m
DOP	tbc
Fire classification	Efl
Use classification	22
TOG rating	1.35

Available colours Easyback | 400 cm 152 | 155 | 156 | 157 | 303 | 333 |

Colour legend 152 Silver 155 Pigeon 156 Dolphin
 157 Pebble 303 Oyster 333 Pecan




These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to modify technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching can not be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet.

BIG Floorcoverings nv Rijksweg 442 | 8710 Wielsbeke - Belgium | T +32 (0)56 67 42 11 | F +32 (0)56 67 48 40 | www.ideal-bintg.com


14.01.2020 | ISO N090N02/2/01-01-10



Beaulieu
 International
 Group

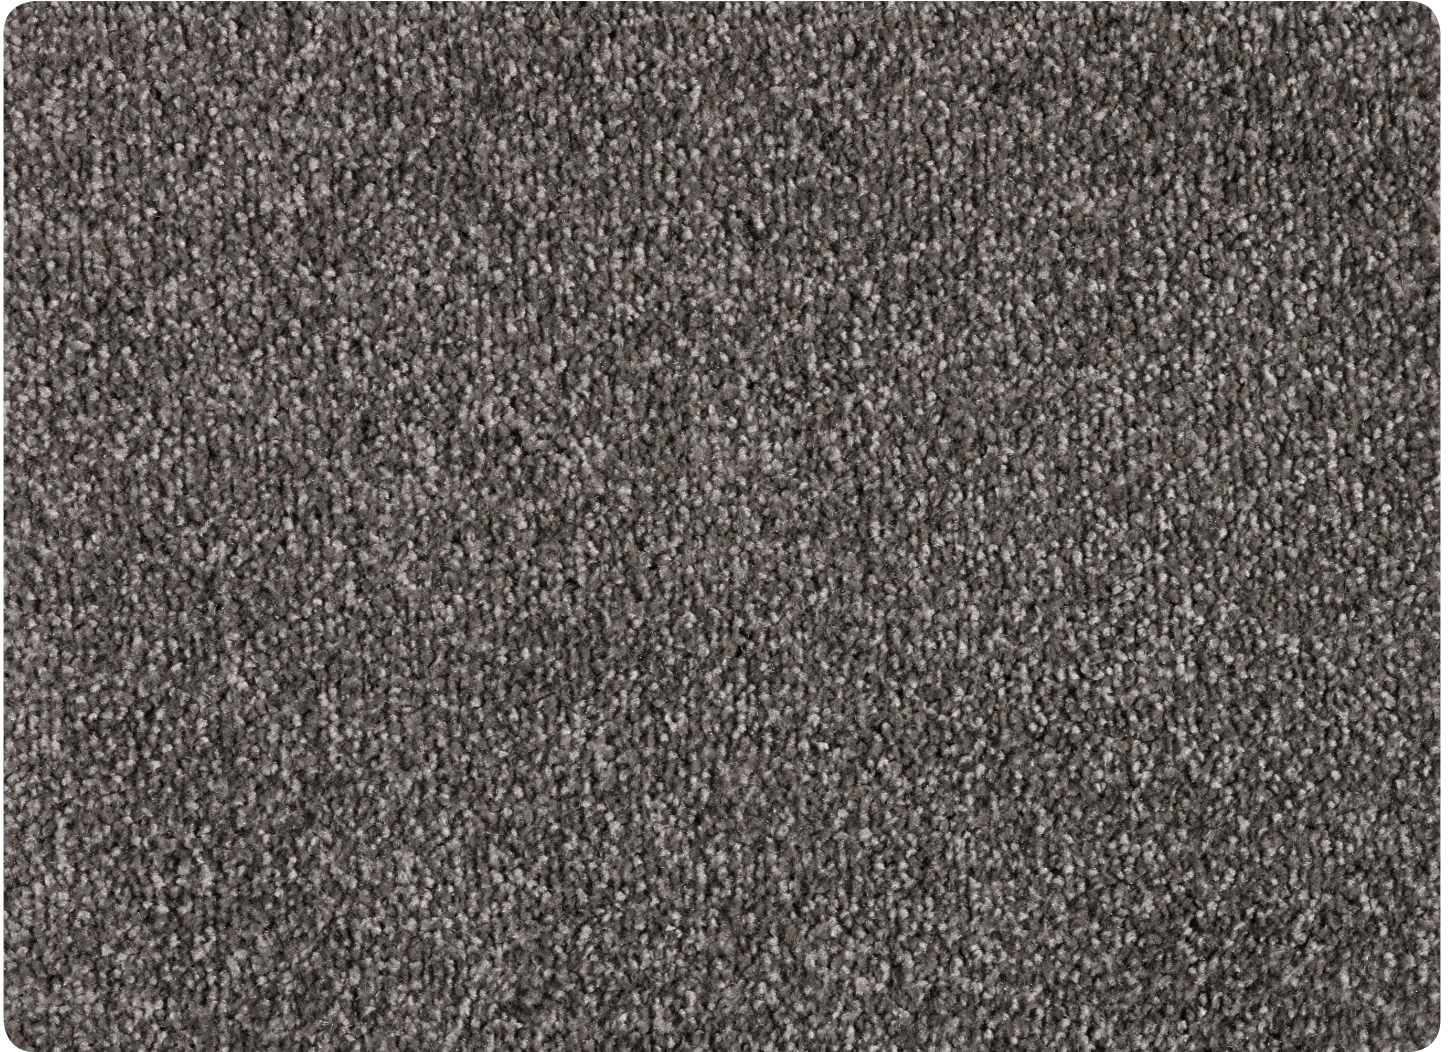

152 - 400 cm

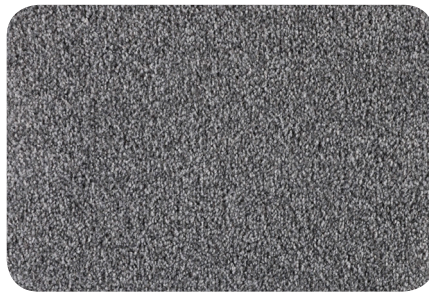

155 - 400 cm



156 - 400 cm



157 - 400 cm



303 - 400 cm



333 - 400 cm