






Self-contained ice maker - Sprayer system Daily production up to 49 kg

#### Position n°



#### Available dice size



# Application fields

#### • Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet
- Undercounter model

#### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	49
21° C	15° C	46
32° C	21° C	40

2 Years Warranty subject to limitations

Certifications available for this model




























Self-contained ice maker - Sprayer system Daily production up to 49 kg

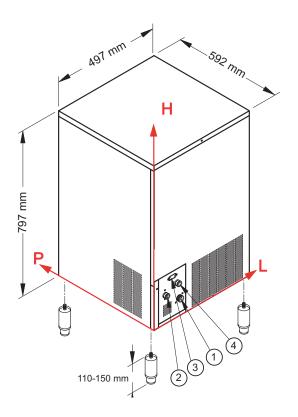

## Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 130 mm - 95 mm - 3/4"
- ② Water outlet: 56 mm - 155 mm - 24 mm
- ③ Electrical connection: 95 mm 225 mm
- 4 Condenser water inlet (only W): 119 mm 181 mm 3/4"

# Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

## • Technical information

Production in 24h	46 kg	
Store capacity, up to	25 kg	
Cooling system	A - W	
Kind of cube	14- <b>17</b> -32-41 g	
Refrigerant	R452A	
Standard voltage	220-240 V ~ 50 Hz	
Electrical consumption	455 W	
Fuse	10 A	
Water consumption	A: 4 l/kg	
	W: 18 l/kg	
Sizes (L-P-H mm)	497 - 592 - 797	
Sizes with pack (L-P-H i	mm) 550 - 660 - 970	
Net weight	46 kg	
Gross weight	54 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:









Sizes without feet

Standard Cube (17 g) Ambient temperature +21° C

Water e temperature +15° C Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued July 2020





