Product Information





SILKOLENE CHAIN LUBE

Synthetic technology aerosol chain lubricant

Description

An advanced synthetic technology lubricant specially designed for high performance motorcycle chains. When first applied, SILKOLENE CHAIN LUBE is sufficiently fluid and mobile to penetrate into the vital pins and bushes of the chain, providing excellent lubrication and corrosion protection. SILKOLENE CHAIN LUBE quickly thickens by solvent evaporation to leave a thin yet durable coating on the external side plates and rollers, offering outstanding corrosion protection while resisting the tendency to fling off, even at high speeds.

SILKOLENE CHAIN LUBE helps to seal the chain and combats the ingress of water and other contaminants which can dramatically reduce chain and sprocket life.

Application

SILKOLENE CHAIN LUBE should be applied sparingly to the inside of the chain, some hours before the motorcycle is to be used. Remove any excess by wiping with a dry rag. Its film forming (creep) properties will ensure complete chain coverage and corrosion protection.

Advantages/Benefits

- Extreme pressure, synthetic technology formula resists shock loading
- Good resistance to high speed fling off
- Excellent film forming properties and corrosion protection
- Thin film resists dirt adhesion
- Suitable for all chains including "O" ring types
- · Resistant to water and wash-off

Specifications

• -

Approvals

•

FUCHS Recommendations

• -

PI60203e, PMA, 06.08.2014





Friesenheimer Straße 19 68169 Mannheim/Germany Phone: +49 621 3701-0 Fax: +49 621 3701-570

E-mail: zentrale@fuchs-europe.de www.fuchs-europe.de www.fuchs-silkolene.de



Product Information






The information contained in this product information is based on the experience and know-how of FUCHS EUROPE SCHMIERSTOFFE GMBH in the development and manufacturing of lubricants and represents the current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pretreatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS EUROPE SCHMIERSTOFFE GMBH application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care.

Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

Any form of reproduction requires express prior written permission from FUCHS EUROPE SCHMIERSTOFFE GMBH.

© FUCHS EUROPE SCHMIERSTOFFE GMBH. All rights reserved.

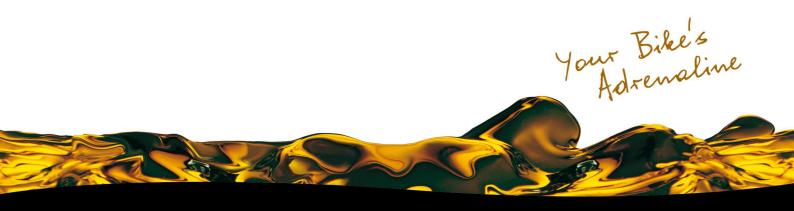



Friesenheimer Straße 19 68169 Mannheim/Germany Phone: +49 621 3701-0 Fax: +49 621 3701-570



