


# DuraSystem® Toilet frame, Basic # WD1020000000

| < 500 mm > |

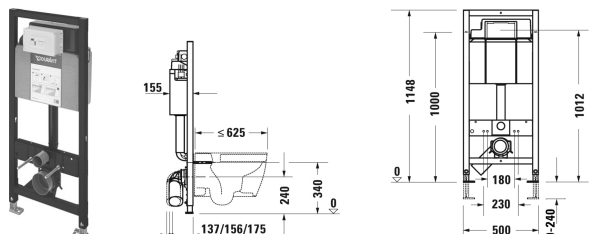

Toilet frame, Basic	Dimension	Weight	Order number
<p>self-supporting, for drywall construction, suitable for panelling with plasterboards, powder-coated frame, for WC ceramics with a projection of ≤ 625 mm, adjustable feet 0-240 mm, mechanical front actuation, flattenings for optimal access of press tools, metre tear and center marker, tool-free assembly of the transparent service opening plate, Requirements of the leading standards of noise protection DIN 4109 and VDI 4100 can be achieved (in combination with noise reduction set # WD6015 000 000), Cistern, concealed cistern CE tested in accordance with EN 14055, maximum flush volume 9l, marking of filling height, Dual flush technology, adjustable flush volume, insulated against condensation, throttle for adjustment of the flushing flow, Scope of delivery, PE-wall-mounted toilet connection bend DN 90/90, PE-wall-mounted toilet connection set DN 90, wall-mounted toilet fastening set M12, PE-wall-mounted toilet reduction DN 90/110 for outlet bend, 2 cover caps, pre-installed toilet frame for wall-mounted toilet</p>			
<b>Colors</b>			
00 White Alpin			
<b>Variant</b>			
	500 x 1148 mm	14.400 kilogram	WD1020000000
<b>Installation accessories</b>			
Pre-installation kit in combination with SensoWash, for in-wall carrier with horizontal support without shower toilet pre-installation/conduit pipe			005072
Mounting accessoires for single installation depth-adjustable 130 - 204 mm, Scope of delivery, 2 Wall brackets, mounting accessoires, for drywall construction	68 x 78 mm	0.900 kilogram	WD6016
Wall-mounted toilet connection set, elongated, 365 mm extended connection set, Scope of delivery, flush pipe with sleeve, straight connector with sleeve, wall-mounted toilet fastening set M12, 2 cover caps, for wall-mounted toilets		0.800 kilogram	WD6010
Noise reduction set self-adhesive, Scope of delivery, set consists of 4 pieces , for structure-borne sound isolation between installation frame and building	65 x 36 mm	0.200 kilogram	WD6015
Extension set 240 mm for extended height adjustment up to max. 480 mm, Scope of delivery, 2 powder-coated feet, 2 plastic support brackets, mounting accessoires, for a raised floor construction		1.500 kilogram	WD6012

## DuraSystem® Toilet frame, Basic # WD1020000000

| < 500 mm > |

Pre-installation kit, hygienic flush for mains operation for panel thickness 7 - 35 mm, Scope of delivery, power supply 100-240 V AC 50/60 Hz with connection cable, concealed outlet for drilling hole ø 68 mm , cover for concealed outlet, conduit pipe, length 1.7 m, for power supply of the hygienic flush, mains operation (#WD6002 000 000), Secondary voltage: 6 V		0.400 kilogram	WD6004
Hygienic flush, for battery operation battery operation via battery module 6V, protection class IP X4, for automatic actuation of the hygienic flush	184 x 102,5 mm	0.300 kilogram	WD6003
Hygienic flush, for mains operation mains operation via external power supply 100-240 V AC 50/60 Hz, protection class IP X4, for automatic actuation of the hygienic flush	184 x 102,5 mm	0.300 kilogram	WD6002
Flush-mounted installation frame, for plastic for flush mounted installation, adjustable in depth, for wall coverings 6 - 15 mm , for drywall construction plating with minimum thickness 2 x 12,5 mm, plastic	224,4 x 154 mm	0.300 kilogram	WD6001
<b>Suitable products</b>			
Actuator plate A1, for toilet, glass white mechanical actuation, for surface mounted installation, Dual flush technology, Scope of delivery, installation frame, mounting accessoires, push rods, front plate glass	229,8 x 157 mm	0.700 kilogram	WD5002
Actuator plate A1, for toilet, plastic mechanical actuation, for surface mounted installation, Dual flush technology, Scope of delivery, installation frame, mounting accessoires, push rods, front plate plastic	217 x 146,5 mm	0.300 kilogram	WD5001

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*