


LASTEN

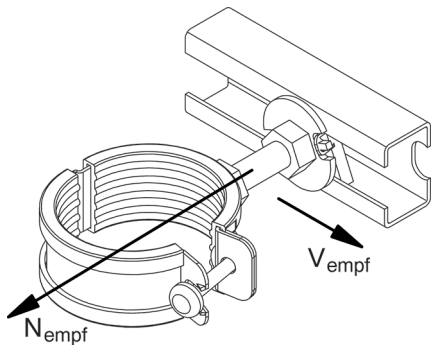

Artikelbezeichnung	Art.-Nr.	max. empfohlene zentr. Zuglast für MS 38/40	max. empfohlene zentr. Zuglast für MS 40/60	max. empfohlener Querzug	Anzugsdrehmoment
		N_{empf} [kN]	N_{empf} [kN]	V_{empf} [kN]	T_{inst} [Nm]
FHS CLIX S 8 x 30	020914	5.0	6.5	1.0	5
FHS CLIX S 8 x 40	020915	5.0	6.5	1.0	5
FHS CLIX S 8 x 60	020916	5.0	6.5	1.0	5
FHS CLIX S 10 x 30	020917	5.0	7.5	1.2	10
FHS CLIX S 10 x 40	020918	5.0	7.5	1.2	10
FHS CLIX S 10 x 60	020919	5.0	7.5	1.2	10
FHS CLIX S 12 x 30	020969	5.0	8.5	1.5	10
FHS CLIX S 12 x 40	047316	5.0	8.5	1.5	10
FHS CLIX S 12 x 60	504320	5.0	8.5	1.5	10