

## KSM32SED8/32MF

32GB 2Rx8 4G x 72-Bit PC4-3200

CL22 260-Pin ECC SODIMM

### DESCRIPTION

Kingston's KSM32SED8/32MF is a 4G x 72-bit (32GB) DDR4-3200 CL22 SDRAM (Synchronous DRAM) w/ parity, 2Rx8, ECC, memory module, based on eighteen 2G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-3200 timing of 22-22-22 at 1.2V. Each 260-pin SODIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

### FEATURES

- Power Supply: VDD = 1.2V
- VDDQ = 1.2V
- VPP = 2.5V
- VDDSPD = 2.20V to 3.60V
- Functionality and operations comply with the DDR4 SDRAM datasheet
- 16 internal banks
- Bank Grouping is applied, and CAS to CAS latency (tCCD\_L, tCCD\_S) for the banks in the same or different bank group accesses are available
- Data transfer rates: PC4-3200, PC4-2933, PC4-2666, PC4-2400, PC4-2133, PC4-1866, PC4-1600
- Bi-Directional Differential Data Strobe
- 8 bit pre-fetch
- Burst Length (BL) switch on-the-fly BL8 or BC4(Burst Chop)
- Supports ECC error correction and detection
- On-Die Termination (ODT)
- Temperature sensor with integrated SPD
- This product is in compliance with the RoHS directive.
- Per DRAM Addressability is supported
- Internal Vref DQ level generation is available
- Write CRC is supported at all speed grades
- CA parity (Command/Address Parity) mode is supported
- RoHS Compliant and Halogen-Free

### SPECIFICATIONS

CL(IDD)	22 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

\*See IDD Specifications (page 2)

### Module Assembly


DRAM: MICRON (F-DIE)
----------------------

Continued >>


## IDD Specifications

Symbol	3200	Units
I <sub>DD0</sub>	882	mA
I <sub>PP0</sub>	45	mA
I <sub>DD1</sub>	981	mA
I <sub>DD2N</sub>	810	mA
I <sub>DD2NT</sub>	801	mA
I <sub>DD2P</sub>	684	mA
I <sub>DD2Q</sub>	756	mA
I <sub>DD3N</sub>	1098	mA
I <sub>PP3N</sub>	36	mA
I <sub>DD3P</sub>	900	mA
I <sub>DD4R</sub>	1602	mA
I <sub>DD4W</sub>	1350	mA
I <sub>DD5R</sub>	954	mA
I <sub>PP5R</sub>	54	mA
I <sub>DD6N</sub>	954	mA
I <sub>DD6E</sub>	1620	mA
I <sub>DD6R</sub>	360	mA
I <sub>DD6A (25°C)</sub>	198	mA
I <sub>DD6A (45°C)</sub>	360	mA
I <sub>DD6A (75°C)</sub>	918	mA
I <sub>DD6A (95°C)</sub>	1620	mA
I <sub>PP6X</sub>	108	mA
I <sub>DD7</sub>	1845	mA
I <sub>PP7</sub>	144	mA
I <sub>DD8</sub>	648	mA

## MODULE DIMENSIONS

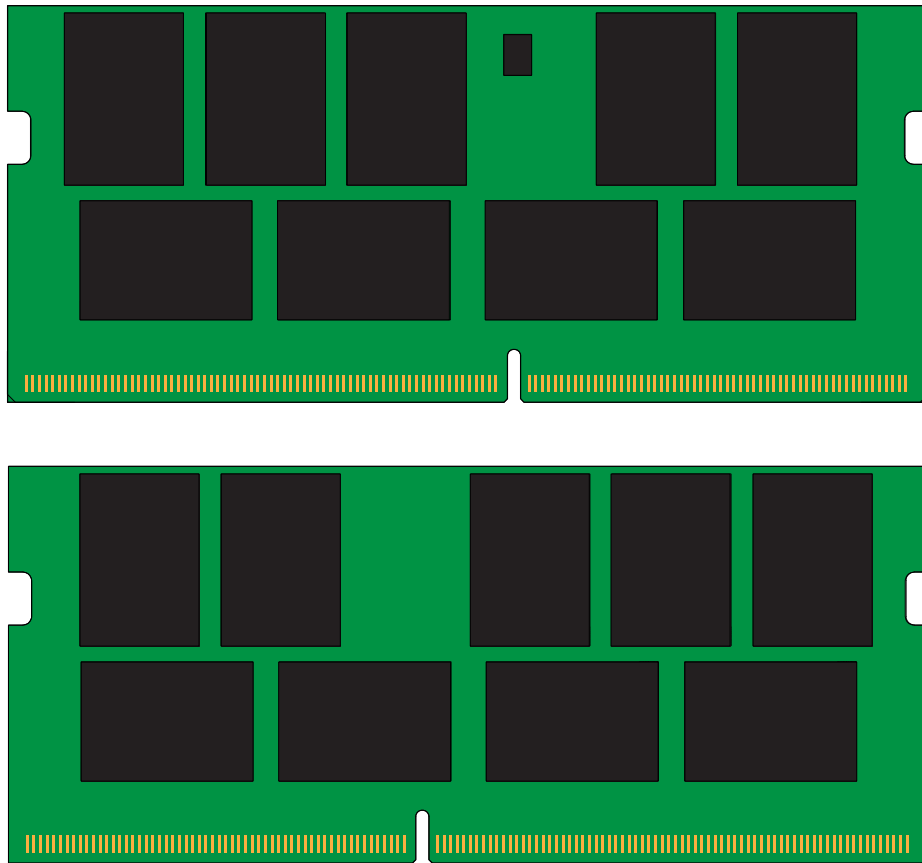

All measurements are in millimeters.  
(Tolerances on all dimensions are  $\pm 0.12$  unless otherwise specified)

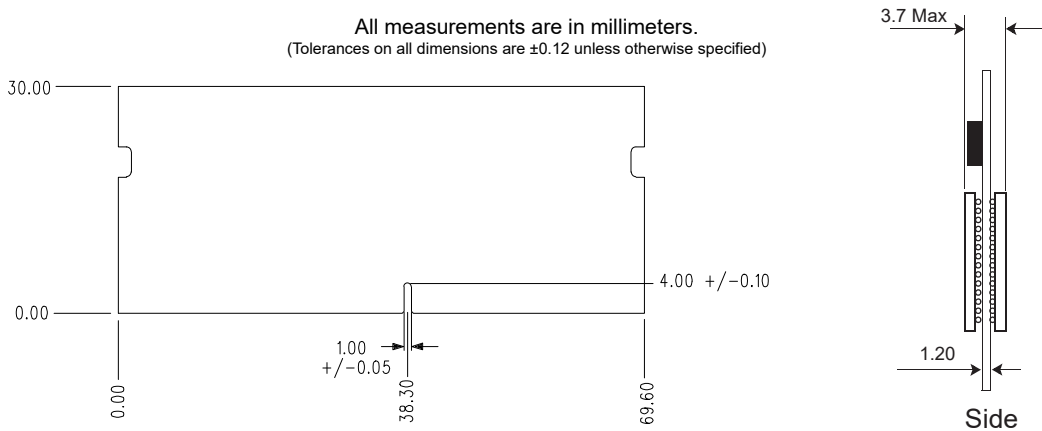

The product images shown are for illustration purposes only and may not be an exact representation of the product.  
Kingston reserves the right to change any information at anytime without notice.