


Zawias kątowy 30°, 45° hydrauliczny HCKT Hydraulic corner cup hinge 30°, 45° HCKT Угловая петля 30, 45°, гидравлическая HCKT



ZASTOSOWANIE / APPLICATION / ПРИМЕНЕНИЕ



PARAMETRY / CHARACTERISTICS / ХАРАКТЕРИСТИКИ

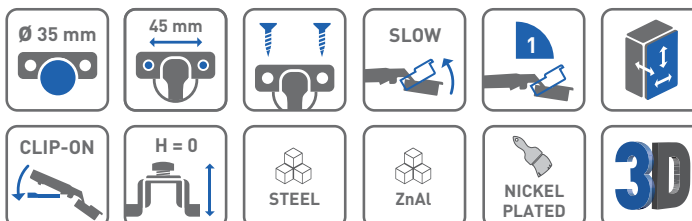

OPCJE ZESTAWU / SET OPTIONS / КОМПЛЕКТАЦИЯ




PAKOWANIE / PACKING / УПАКОВКА



SKŁAD ZESTAWU / SET INCLUDES / КОМПЛЕКТАЦИЯ




ZAWIAS KĄTOWY
CORNER HINGE
УГЛОВАЯ ПЕТЛЯ

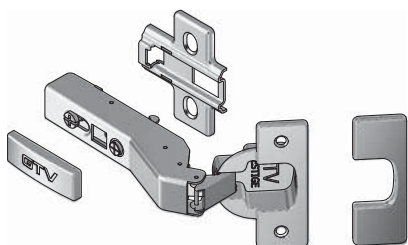


ZM-HCKT30-BE-S	x 4	—
ZM-HCKT30-ZE-S	x 2	x 2



ZAWIAS KĄTOWY
CORNER HINGE
УГЛОВАЯ ПЕТЛЯ

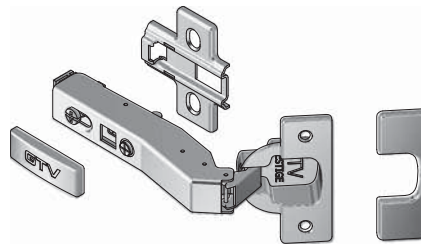


ZM-HCKT45-BE-S	x 4	—
ZM-HCKT45-ZE-S	x 2	x 2

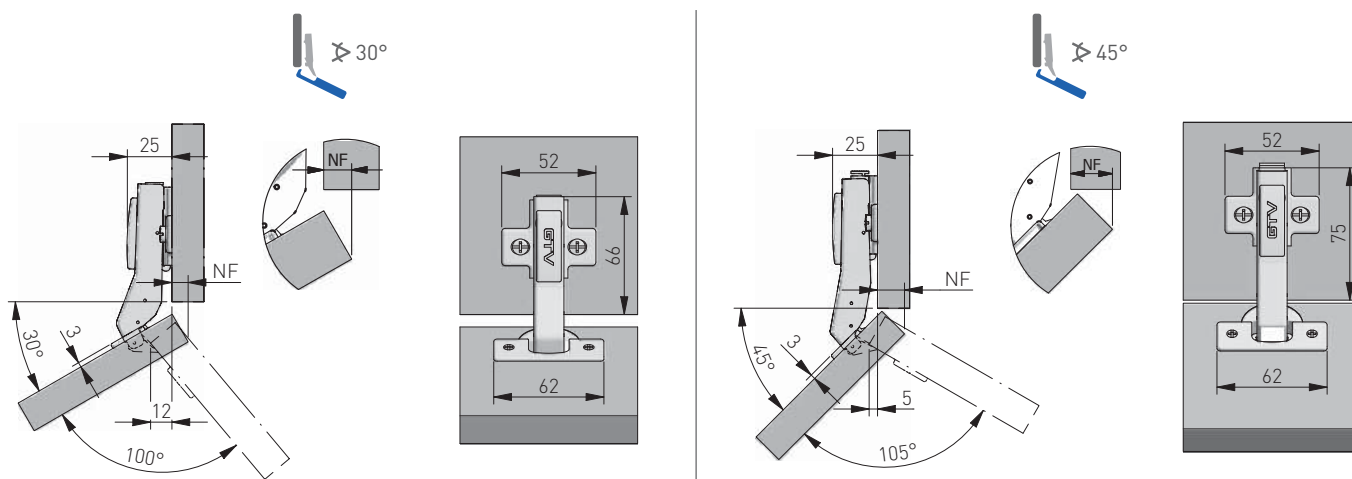


MONTAŻ / MOUNTING / МОНТАЖ

montaż prowadnika w korpusie
mounting plate installation
присадка под ответную планку

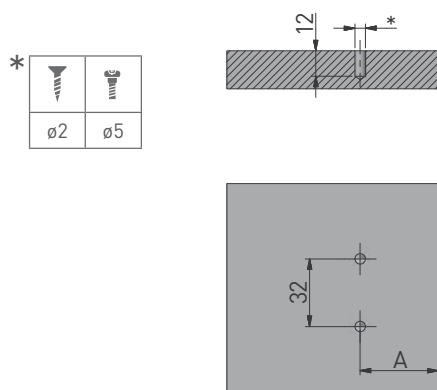

montaż puszki we froncie
hinge cup installation
присадка под чашку петли

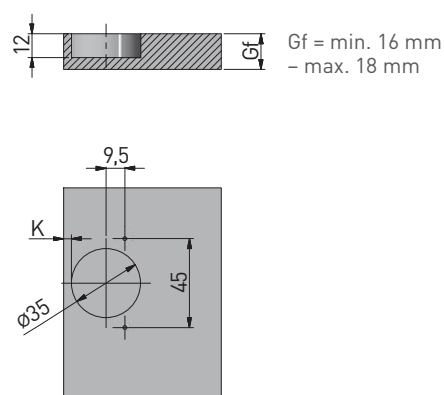

A = 37	A = 37

A = odległość prowadnika od krawędzi (mm)
gap between mounting plate
and the cabinet edge (mm)
расстояние от ответной планки
до края (мм)

											
	NF	6	7	8	9	10	9	10	12	13	14
H = 0	K			3	4	5			3	4	5

NF = nałożenie frontu (mm)
front overlay (mm)
наложение фасада (мм)

H = wysokość prowadnika
mounting plate height
высота ответной планки

K = odległość puszki od krawędzi (mm)
gap between hinge cup and cabinet edge (mm)
расстояние от чашки петли до края (мм)

Gf = grubość frontu
front thickness
толщина фасада

REGULACJA / ADJUSTMENT / РЕГУЛИРОВКА



± 2 mm



± 2 mm



± 2 mm