

★ MINERAL GEAR OIL.


This is an extreme-pressure lubricant for gear boxes, specifically formulated to satisfy the highest service conditions: high speed, shockloads and high torque at low speeds.

★ APPLICATIONS

Recommended for all hypoid transmissions and also suitable for spiral bevel gears, worm wheels and most transaxles.

★ PERFORMANCE LEVEL

- API: GL-5
- MAN: 342 M-1
- MAN: 342 M-2
- MIL: MIL-L-2105 C
- MIL: MIL-L-2105 D
- ZF: TE-ML 05A
- MB 235.0
- ZF: TE-ML 07A
- ZF: TE-ML 12E
- ZF: TE-ML 12M
- ZF: TE-ML 12N
- ZF: TE-ML 16B
- ZF: TE-ML 16C
- ZF: TE-ML 17B
- ZF: TE-ML 19B

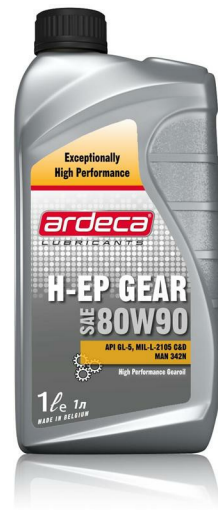

★ FEATURES

Frictional properties : easy gear shifting.

Anti-wear protection : long transmission life.

★ CHARACTERISTICS

	unit	average value
Density at 15 °C	kg/l	0.893
Viscosity 40 °C	mm ² /s	150.50
Viscosity 100 °C	mm ² /s	15.20
Viscosity Index		102
Flash Point COC	°C	214
Pour Point	°C	-27

★ PACKAGING

