


Mounting Hardware:


*

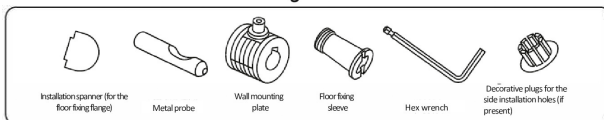

*The appearance of the product and parts may vary from what is shown in the photos.


Hidden mounting system

- 1**

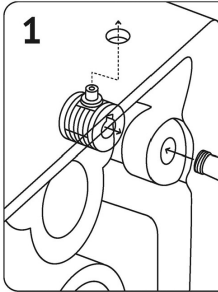


Using the mounting grommet, (with a socket wrench) we install the bracket fixture to the inside of the mounting hole on the bowl.
 The screw of the bracket fixture should be oriented toward the mounting hole.


(Depending on the toilet model, the bracket fixtures and mounting grommets may be pre-installed on the bowl at the factory)
- 2**

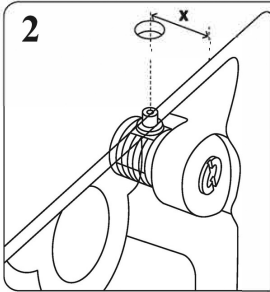


Determine the distance "x" from the center of the bracket screw to the edge of the bowl.
- 3**

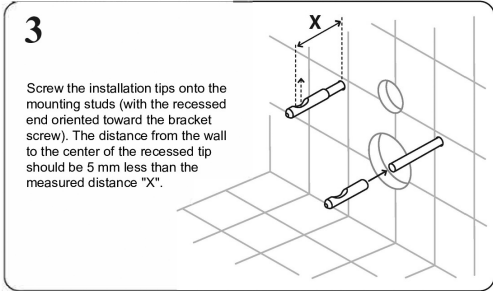


Screw the installation tips onto the mounting studs (with the recessed end oriented toward the bracket screw). The distance from the wall to the center of the recessed tip should be 5 mm less than the measured distance "X".
- 4**

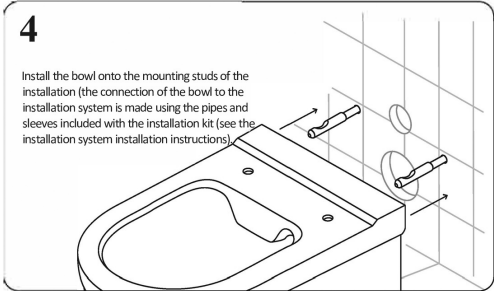

Install the bowl onto the mounting studs of the installation (the connection of the bowl to the installation system is made using the pipes and sleeves included with the installation kit (see the installation system installation instructions)).
- 5**

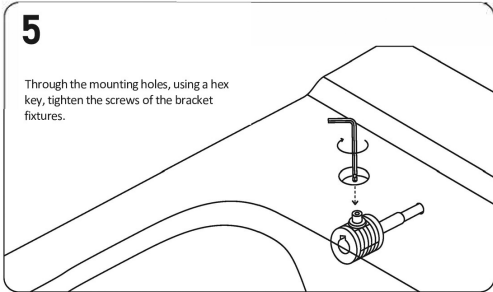

Through the mounting holes, using a hex key, tighten the screws of the bracket fixtures.
- 6**

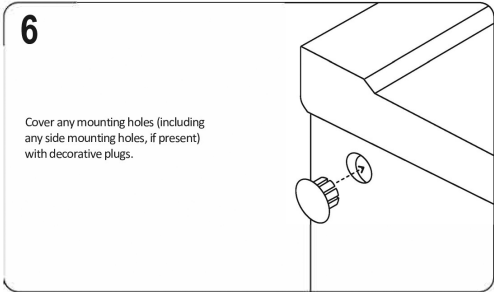

Cover any mounting holes (including any side mounting holes, if present) with decorative plugs.
- 7**

Make sure that:
 The bowl is securely fixed in place
 There are no leaks when flushing


✂ Installation Tips

- Before installation, make sure the product has no defects from transportation and that all parts are included. After installation, claims regarding defects from transportation, damaged surfaces or missing parts will not be accepted.
- Installation must follow the requirements specified in these instructions.
- Installation tools are not included.

⚠ Product Care

The glazed surface is easy to clean. For regular light cleaning, use a soft cloth or sponge, soap and water. After cleaning, wipe the surface dry with a cloth. For deep cleaning, use gentle cleaning agents following the manufacturer's instructions.

Do not use abrasive sponges or solvents that may damage the surface. Avoid bleaches containing acids. Damage caused by improper care is not covered by the warranty. The warranty is valid only if installed by a professional according to these instructions. The manufacturer reserves the right to change components that do not affect functionality or appearance, while maintaining the stated warranty period.

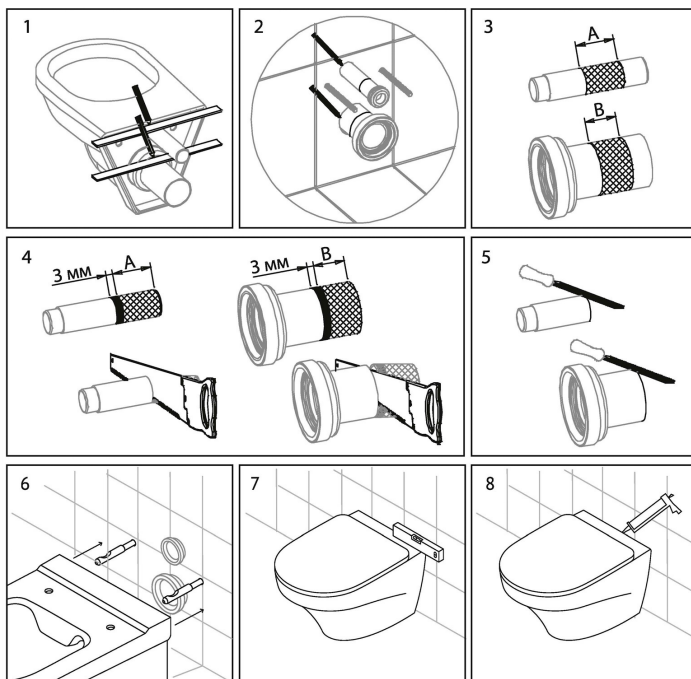

Important! Use the product only as intended.
Do not flush items that could clog the system. Do not pour hot water down the toilet!

We recommend using sealant for hygiene purposes and to prevent moisture from getting under the ceramic.
 Auxiliary materials (silicone, sealant, etc.) are purchased separately.