

GRAPHENE 360 SPEED 120



For optimum performance use: HEAD Reflex

Total String Length: 7,5 m / 24,6 ft

String Pattern: 12 Main (4,0 m / 13,1 ft)
17 Cross (3,5 m / 11,5 ft)


Rec. String Tension: 11-13 kg / 24-29 lbs

Main Strings

Start at the Centre top holes L + R1. For the right side of the Main strings clamp 2,0m (6.6ft) of string at hole R1. Tighten 2 main string right, two main strings left and so on skipping out holes L + R6, L + R24. Tie off at holes L + R5.

Cross Strings

Tie on the cross string at R25 and lace the string through hole R24. Tighten all cross strings in the direction of the throat skipping out holes L + R7 and L23 + R23. Tie off at hole L4.

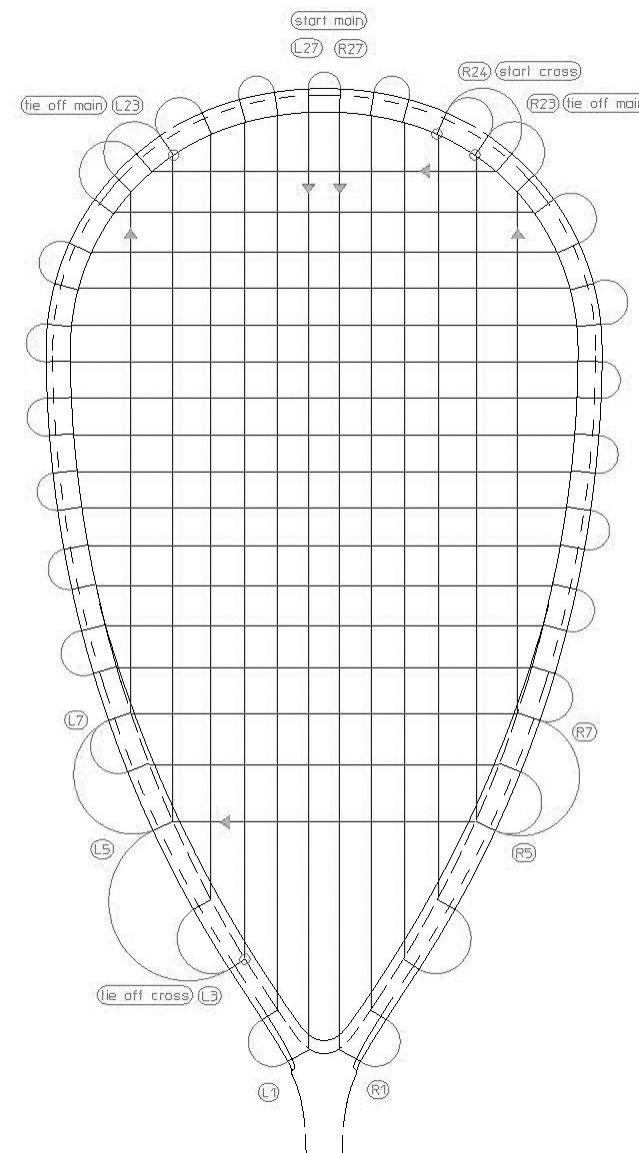

GRAPHENE 360 SPEED 120 - FAN



For optimum performance use: HEAD Reflex

Total String Length: 10,0 m / 32,7 ft

String Pattern: 12 Main (6,0 m / 19,4 ft)
17 Cross (4,0 m / 13,3 ft)

Rec. String Tension: 11-12 kg / 24-26 lbs

Main Strings

Start at the TOP centre holes L + R27. For the right side of the Main strings clamp 3,0m (9,8ft) of string at hole R1. Tighten 2 main string right, two main strings left and so on skipping out holes L + R22, L + R20, L + R18 as well as L + R17. The main strings share holes L + R4, 3, 2 and 1. Tie off at holes L + R23.

Cross Strings

Tie on the cross string at R24 and lace the string through hole R22. Tighten all cross strings in the direction of the throat skipping out holes L + R4. Shared holes with main strings are L + R20 and L + R17. Tie off at hole L3.

