

accutone®

INVINIT 6

premium active noise-cancelling UC headset



User Guide

Main Interface and Controls



- | | |
|----------------------------|--------------------------|
| 1. Leatherette Headband | 7. UC On-Hook Button |
| 2. Rubber Headrest (Mono) | 8. Volume Up Button |
| 3. Microphone Capsule | 9. Volume Down Button |
| 4. LED Busy Light Ring | 10. Microphone Mute |
| 5. Leatherette Ear Cushion | 11. Status LED Indicator |
| 6. Headband Extension | 12. Cable Strain-Relief |



Wearing Method



Adjust the Headband
Put on the Headset as shown, Extend the headband to fit your head size, retract the headband slightly to make sure the headset fits firmly.



Wearing Style | Left or Right

Invinit 6 can be worn with the microphone on the right or on the left. Simply rotate the microphone boom as shown above for your preferred wearing style.

Wearing Method


Microphone Position
Rotate the mic boom as shown and lightly bend the boom arm towards your mouth. Keep about 0.5 inch distance only.



Connecting to USB jack

Plug and play to most computer systems including Windows, Macintosh, Linux and some gaming consoles, completely driver-free.

Understanding the Controls

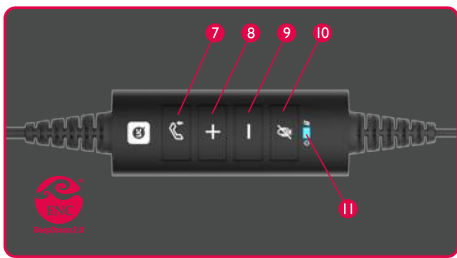

Environmental Noise Cancelling (DeepOcean™ Technology 2.0)

Inivinit 6 comes with DeepOcean™ Technology, which is active noise-cancelling for the microphone. User in a noisy environment can speak lightly into the microphone and the listener on the other end can hear clearly the voice only. ENC, also known as CVC, is created using two microphones, one capturing the speaker's voice, and the other capturing the environmental noise. Through a proprietary algorithm, the two sources cancel out the background noise, leaving only the speaker's voice. With the newest upgrade to v2.0, it is capable of doubling the background noise reduction compared to the original version, maxed out at 30dB. ENC is **always-on** for Inivinit 6, no further activation is required.

Unified Communication (UC Button)

No need to install any driver, Inivinit 6 is compatible with UC programs like Skype for Business 2016 MSO (16.0.12430.20112). With the headset connected and Skype for Business in standby, press (7) UC On-hook Button when a call comes in to answer, and press it again to end your skype call.

Volume Controls and Online Indicator

Press (8) Volume Up and (9) Volume Down buttons to adjust listening volume. Press (10) Microphone Mute to mute the microphone only. If user wants to mute the speakers, this can be done by reducing volume to the lowest level.

The (11) Status LED-Indicator has the following indications:

Power On/Standby	Solid Blue
Incoming Call/In-Use	Flashing Blue
Microphone Muted	Solid Red

Understanding LED Busy Light



Headset Busy Light Status Table:

Headset Status*	LED Color
Connected/Power On	White
Idle/Standby	White
Chat Mode (both speaker and microphone are on)	Red
Ringing	Red
Playback Mode (only speaker is turned on)	White

*The headset light indication might have a slight delay during status change. Some audio-related software may need to be closed to return the light indication to standby status.

Precautions

Do not place or store your headset in any hot or excessively humid place. Do not clean your headset with any form of chemical substance, only use warm water. Do not try to disassemble any part of the headset except replacing the leatherette ear cushions. Do not use or place the headset in environments of excessive dust or minute particles. Failure to follow the above advices will violates your warranty without any further need of justifications.